


E-04

Enlucite®

## RECOATING SN

Suitable for filling in and re-coating cavities and cracks

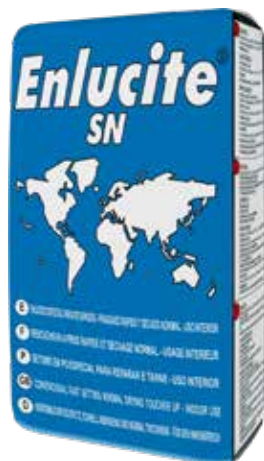

INTERIOR



### USES

Gypsum, plaster, cement, non-elastic plastic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

### FEATURES & USES

- Fast setting
- Standard dry.
- Thin layer and thick layer applicable
- Easy to sand.
- Easy to apply.
- Recoating of union joints between plates.
- Pasting frames.
- Recoating cracks and non-structural gaps.
- Storage: 6 months inside its original packing and kept free from damp and humidity.



### RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY CODE (EN 16566):

CÓDIGO (EN 16566):

**G3S2V3W2A0C0R0**



Pallet of 66 sacks of 15 kg.



Pallet of 35 cases of 4 x 5 kg.



Pallet of 36 cases of 20 x 1 kg.



#### Water for mixing

0,45 – 0,50 litres of water per kg of plaster



#### Performance in 1mm layer

1.50 - 1.55 Kg/m<sup>2</sup>



6.0 - 7.0



#### Maximum thickness per layer

10 mm. for plastering  
Unlimited for recoating



MPa

#### Adhesion

> 4 Kg/cm<sup>2</sup> on cement  
> 3 Kg/cm<sup>2</sup> on paint.



#### Fire classification

A1



#### Useful life

30 - 60 min



#### Drying in 1mm thickness

Plaster: 3 - 4 hrs.  
Concrete & paint: 4- 6 hrs.



#### Maximum granulometry

200 microns