


E-05

Enlucite®

FAST FILLERS SR

Plaster for the interior for filling in and re-coating cavities and non-structural cracks.
Fast dry.

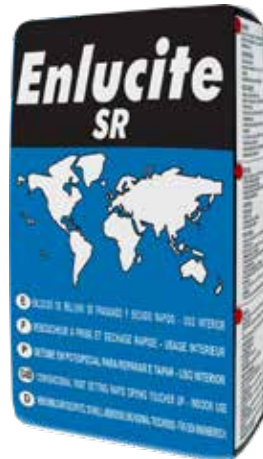

INTERIOR



USES

Gypsum, plaster, cement, pre-fabs, non-elastic plastic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES

- Fast setting
- Fast dry.
- Does not shrink or crack.
- Contains anti-cracking additives.
- Thin layer and thick layer applicable.
- Easy to sand.
- Easy to apply.
- Recoating of union joints.
- Pasting frames.
- Recoating non-structural gaps.
- Storage: 6 months inside its original packing and kept free from damp and humidity



RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE
COMPLETELY DRY CODE (EN 16566):

CÓDIGO (EN 16566):

G3S2V3W2A0C0R0


Pallet of 66 sacks
of 15 kg.



Pallet of 35 cases
of 4 x 5 kg.



Pallet of 35 cases
of 20 x 1 kg.



Water for mixing

0,47 – 0,53 litres of water per kg of plaster



Performance in 1mm layer

1.50 - 2.00 Kg/m²



6.5 - 7.5



Espesor máximo por capa

10 mm. for plastering
Unlimited for recoating



MPa

Adhesion

> 10 Kg/cm² on cement
> 9 Kg/cm² on paint.



Fire classification

A2 - s1 - d0



Useful life

35 - 60 min



Drying in 1mm thickness

Plaster: 2 – 3 hrs.
Concrete & paint: 4- 5 hrs.



Maximum granulometry

300 microns