

PX-08

Imper

REPELEX P

Transparent water-repellent film destined for the protection
of outdoor facades and vertical surfaces



INFORMATION ON DIRECTIVE 2004/42/CE

CATEGORY h2, CONSOLIDANT PRIMERS, SOLVENT-BORNE

LIMIT: 750 g/l COV (2007); 750 g/l COV(2010)
This product contains 725,84 g/l COV max.



USE


Cement, stone, brick, concrete, masonry and clinker brick. Surfaces should be sound, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES

- Transparent water repellent.
- Wet effect.
- Penetrates, seals and protects surfaces.
- Self-cleaning
- Easy to apply
- Breathable product
- Enhances colour and the initial appearance of the surface, keeping surface steadfast on rainy days.
- Great penetration power.
- Prevents carbonisation
- Storage: 12 months year inside its original container and kept free from damp and humidity.

IDEAL FOR

- Protects surfaces from aggressiveness of rain.
- Protects from saltpetre and efflorescence formation
- Protects from erosion and dirt.

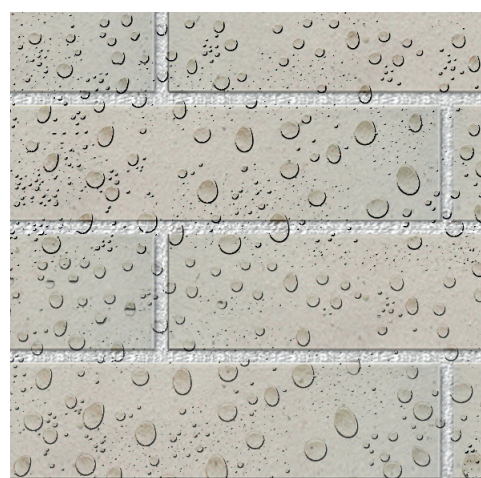

Pallet de 30 boxes
of 2 x 4 l.



Pallet de 44 boxes
of 8 x 750ml.



Preparation
Ready to use.



Performance
0.150-0.200 l/m²



5.0-6.0



Apply with brush, roller,
Cleaning of tools, Airless sprayer



Cleaning of tools
Use solvent immediately after use



Fire classification
B-s1-d0



Useful life
Unlimited



Solvent-based product