




SPECIAL PAINT MESH

Fiberglass mesh especially intended for reinforcing walls and roofs coatings, increasing their resistance to fisuration.

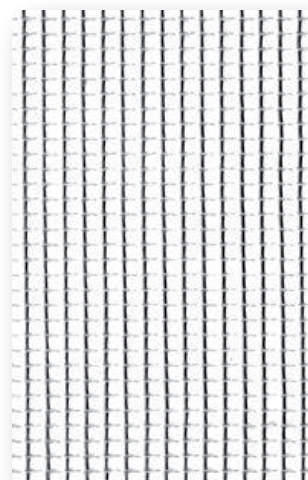

Width	100 cm
Large	50 m
Weight	40 gr / m ²
Sieve	2,4 x 2,4 mm
Warp	45 x 2 tex.
Weft	100 tex.
Tension resistance	warp: >850 N/ 5 cm weft: >650 N/ 5 cm
Composition	Woven Fiberglass with glasses type C or E, jointed with polypropylene.
Characteristics	Highly resistant to alkalis Thermic Isolation Great mesh stability