




SPECIAL GYPSUM MESH

Fibreglass mesh especially intended for preventing cracks and fissures formation in new masonry and for repairing and covering these formed in reinstatements.

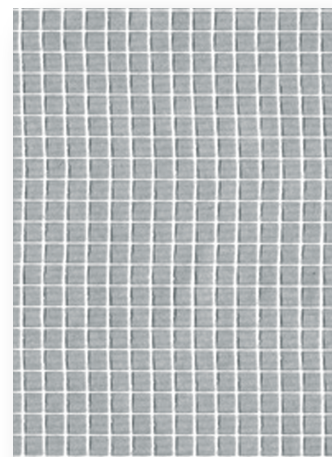

Width	100 cm
Large	50 m
Weight	70 gr / m ²
Sieve	5,0 x 5,0 mm
Tension resistance	warp: 750 N/ 50 mm weft: 750 N/ 50 mm
Composition	Woven Fiberglass with glasses type C or E, jointed with polypropylene.
Characteristics	Highly resistant to alkalis Thermic Isolation Great mesh stability