


# RX-406

# RX-406C

**Rualaix®**

## FIBROLASTIC

Elastic micro-fibred putty suitable for filling in and sealing cracks and fissures subject to movements. Textured finish.



### INFORMATION ON DIRECTIVE 2004/42/CE

CATEGORY i1, HIGH PERFORMANCE ONE COMPONENT COATINGS WATER-BASED

LIMIT: 140 g/l COV (2007); 140 g/l COV(2010)  
This product contains 27,10 g/l max.

### COATED

BY ALL KINDS OF CONVENTIONAL NON- RESILIENT PAINTS AFTER COMPLETE DRYING

CLASSIFICATION ACCORDING TO  
STANDARD EN 16566

**G3S3V2W2A0C0R0**

## USE


Gypsum, plaster, cement, brick, stone, wood, concrete, cellular concrete, semi-absorbent surfaces. Surfaces should be sound, dry, cohesive, absorbent, dry, well adhered and free of dust.

## FEATURES

- Micro-fibred
- Textured product.
- Excellent thixotropy.
- Minimum shrinkage.
- Great adhesion.
- Smoothing without fibre migration to the surface.
- Highly flexible regardless of the temperature.
- Storage: 12 months inside its original packing and kept free from damp and humidity.

## IDEAL FOR

- Filling in and sealing cracks and fissures on ceilings and façades subject to movement.

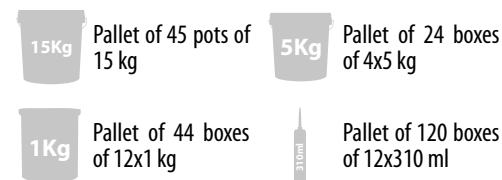

### PREPARATION

Ready to use. Clean tools with water



### PERFORMANCE

36-48 g/lineal metre



9.0 - 10.0



### MAXIMUM THICKNESS PER COAT

10 mm



### ADHESION

>11 Kg/cm2 on concrete



### FIRE RESISTANCE CLASSIFICATION

D - s2 - d0



### USEFUL LIFE

Unlimited



### DRYING TIME

Plaster: 3 - 4 hrs.



### MAXIMUM GRADING

1000 microns with threads of fibre